





GS E103

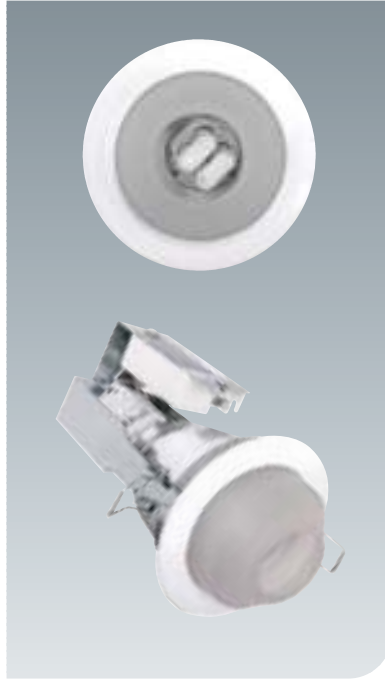

GS J103

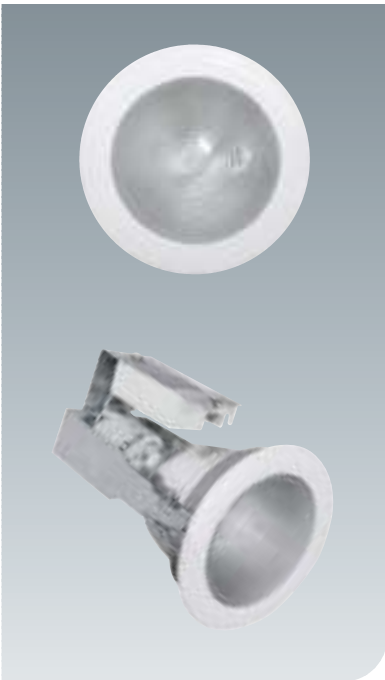

GS K103



GS S103



LAMP TYPE	SOCKET	ØA (mm)	H (mm)	K.G.
1x10 W CT	G24d	115	120	1,1
1x13 W CT	G24d	115	145	1,1
1x 12/50 W HA	G4	115	95	0,95



## GS 103 SERİSİ

- BODY** : Aluminium Injection & Electrostatic Painted Frame
- CAM/DIFFUSER** : Transparent, Opal or Crystal Diffuser Options
- REFLECTOR** : Special Coated Aluminium Reflector For Maximum Reflection and Efficiency
- ELECTRICAL COMP** : Magnetic / Electronic / Dimmable Ballast, Emergency Kit Additionally Applicable
- PROTECTION CLASS** : IP 20
- OTHER FEATURES** : Lamp Suitable for Vertical Use  
Easy Removable Frame for Painting of Ceilings Without Removal
- USAGE AREAS** : Interiors, Plaster Ceiling Applications, Conference Halls, Shopping Malls, Hallways, Offices, Shopping Windows

- GÖVDE** : Alüminyum Enjeksiyon & Elektostatik Boyalı Çerçeve
- CAM/DİFÜZÖR** : Transparan, Opal veya Kristal Difüzör Opsiyonları
- REFLEKTÖR** : Maksimum Yansıma ve Verim için Özel Kaplamalı Alüminyum Reflektör
- ELEKTRİKSEL KOMP** : Manyetik / Elektronik / Dim Edilebilir Balast ve Ek Uygulanabilir Emergency Kit (Acil Kit)
- KORUMA SINIFI** : IP 20
- DiĞER ÖZELLİKLER** : Dikey Ampul kullanımına uygun Sökme Gerektirmeden Tavan Boyama İçin Kolay Çıkarılabilir Çerçeve
- KULLANIM ALANLARI** : İç mekanlar, Alçı Tavan Uygulamaları, Konferans Salonları, Alışveriş Merkezleri, Koridorlar, Ofisler, Vitrinler

