Opal Acrylic Diffuser
Opal Akrilik Cam

Center Frosted Glass
Ortası Kumlu Cam

Prismatic Glass
Prizmatik Cam

Different variations of GSSY 155 with 2x18W lamp, Available options are frame colors and diffuser variations which are selectable on request. Frame part is removable and fixed to the housing by 2 spring clips. Easy serviceable without moving whole frame by deatthaching only 1 spring clip. Another advantage is frame completely removable without need of any tools easily during ceiling painting processes. By this property no-need to demount complete downlight housing to carry out painting works.

GSSY 155 Modelinin 2x18 W tipinin farklı varyasyonları, Opsiyonel olarak talep üzerine belirlenebilen varyasyonlar çerçeve rengi ve cam seçenekleridir. Çerçeve kısmı ana gövdeye 2 adet yay klips ile sabitlenmektedir. Tüm çerçeve yerinden çıkarılmadan sadece tek yay yerinden çıkartılarak kolayca servis verilebilir. Diğer bir avantaj olarak tavan boyama işlemi esnasında tüm çerçeve alet kullanımı gerektirmeden kolaylıkla sökülebilmektedir.Bu sayede armatürün yerinden sökülmesine gerek kalmadan tavan boyama işlemleri tamamlanabilir.

	LAMP TYPE	SOCKET	ØA (mm)	H (mm)	K.G.
	1x13 W CT	G24d	174	90	1,65
	1x18 W CT	G24d	174	90	1,75
	2x13 W CT	G24d	174	110	1,85
	2x18 W CT	G24d	174	110	2,32
	2x ECO (Max)	E27	174	110	2,1

BOX / KOLİ
(mm)

GSSY 155

BODY : ABS Ceiling Frame & Galvanized Body

GLASS/DIFFUSER : Prismatic, Transperant, Opal ,Semi-Transparent Diffuser Options

REFLECTOR : Special Coated Aluminium Reflector For Maximum Reflection and Efficiency

ELECTRICAL COMP : Magnetic / Electronic / Dimmable Ballast, Emergency Kit Additionally Appliciable

PROTECTION CLASS: IP 40

OTHER FEATURES : Easy Removable Frame for Painting of Ceilings Without Removal
Easy connection With Developed Independent ABS Gear Box and Electrical Equipment Sockets

USAGE AREAS : Interiors, Plaster Ceiling Applications, Conference Halls, Shopping Malls, Hallways, Offices, Shopping Windows

GÖVDE : ABS Tavan Çerçevesi & Galvaniz Gövde

CAM/DİFÜZÖR : Prizmatik, Transparan, Opal, Yarı-Opal Cam Opsiyonları

REFLEKTÖR : Maksimum Yansıma ve Verim için Özel Kaplamalı Alüminyum Reflektör

ELEKTRİKSEL KOMP: Manyetik / Elektronik / Dim Edilebilir Balast ve Ek Uygulanabilir Emergency Kit (Acil Kit)

KORUMA SINIFI : IP 40

DİĞER ÖZELLİKLER : Sökme Gerektirmeden Tavan Boyama İçin Kolay Çıkarılabilir Çerçeve
Geliştirilmiş Bağımsız ABS Balast Kutusu ve Elektriksel Ekipman Soketleri ile Kolay Bağlantı
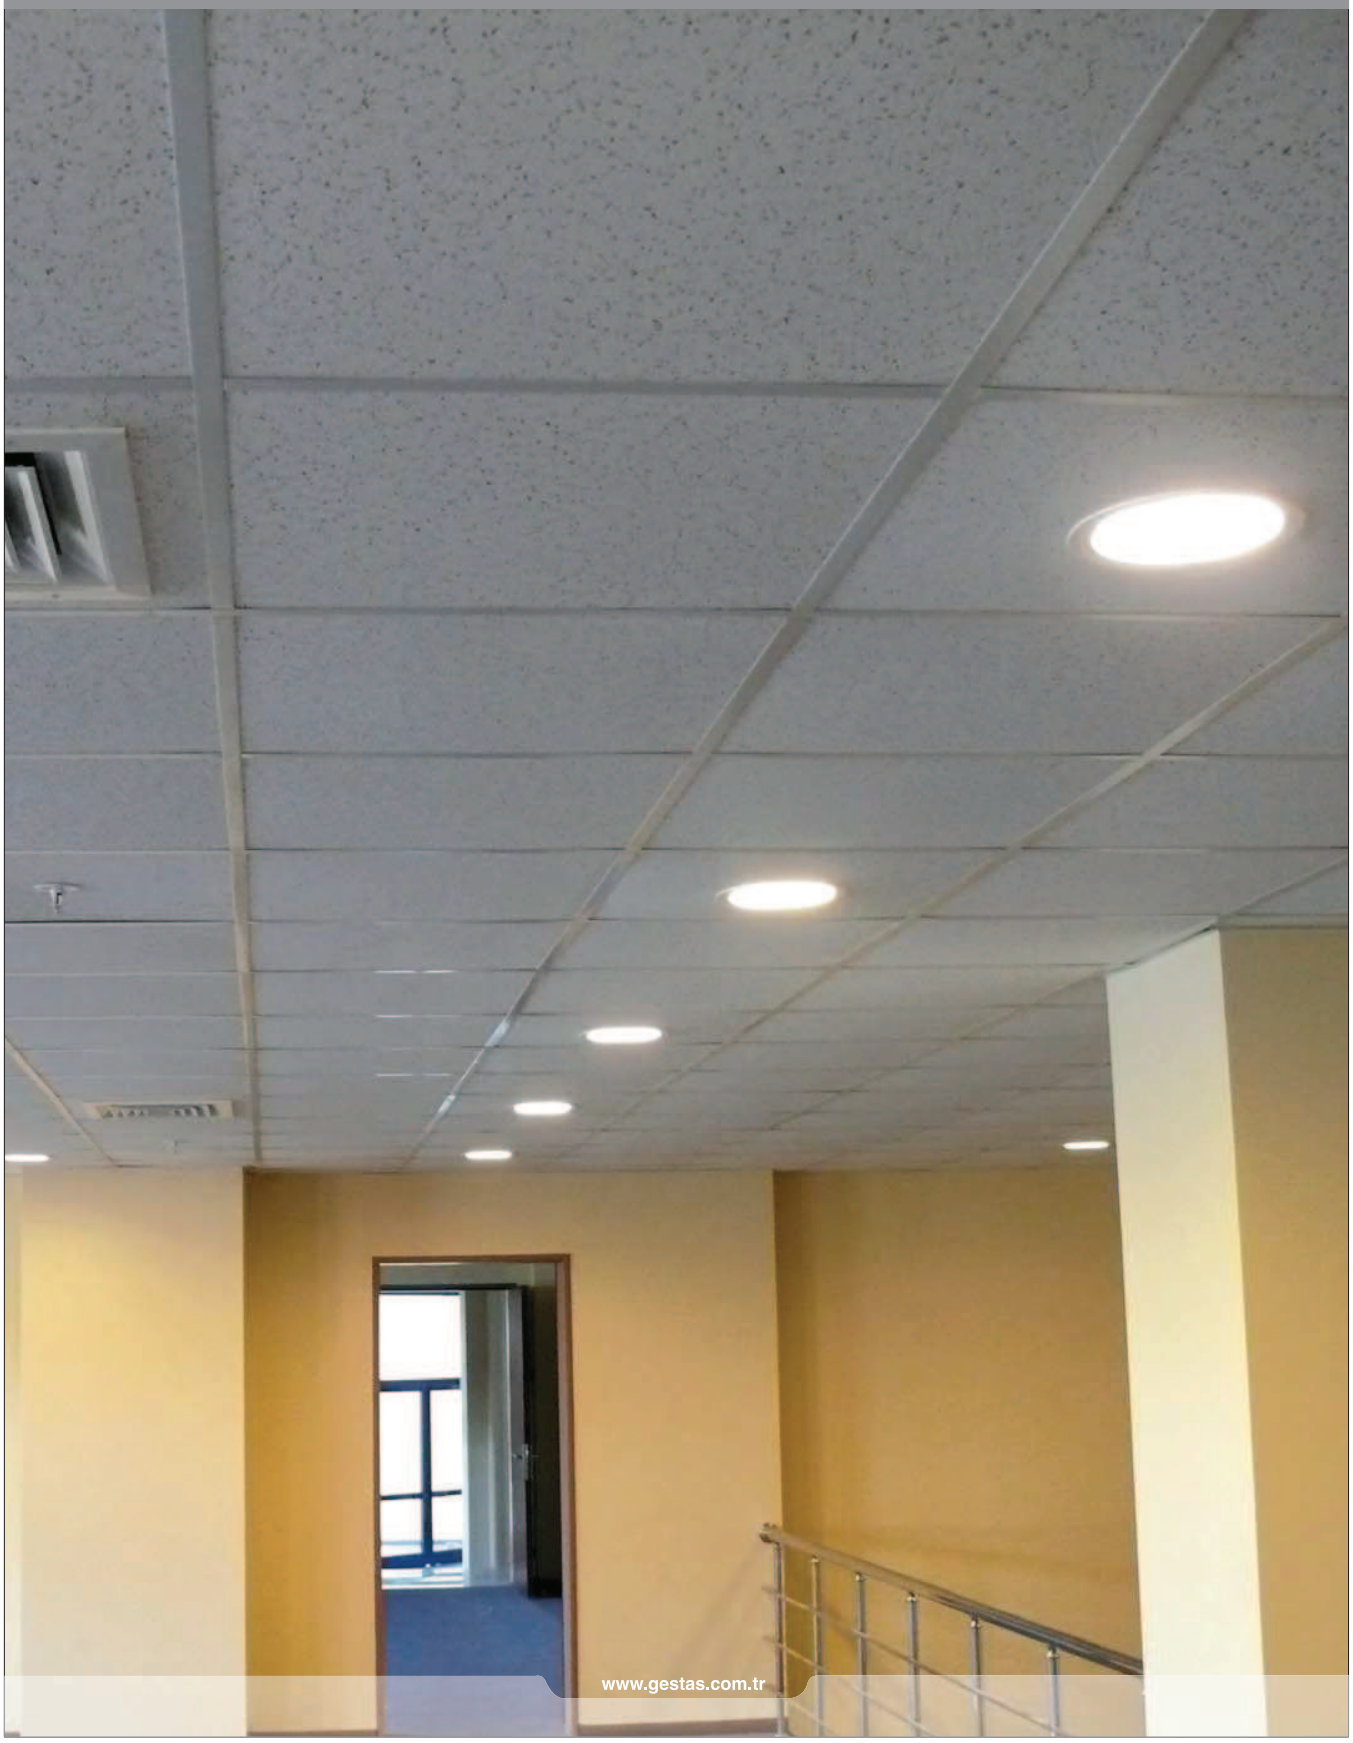
KULLANIM ALANLARI : İç mekanlar, Alçı Tavan Uygulamaları, Konferans Salonları, Alışveriş Merkezleri, Koridorlar, Ofisler, Vitrinler