


GPTA 1

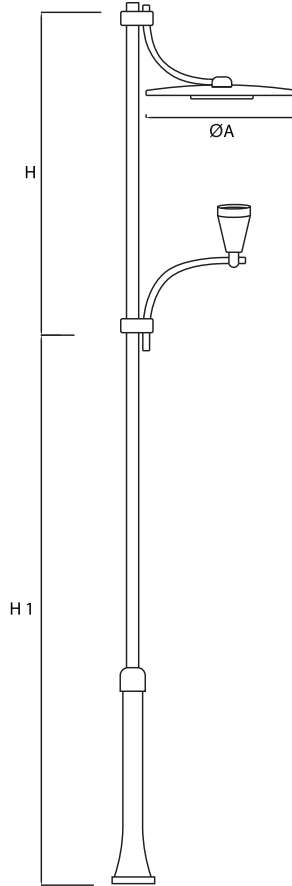

BODY : Aluminium Die-Cast & Electrostatic Painted
GLASS/DIFFUSER : Tempered Glass
REFLECTOR : Metallized Polycarbon (PC) Reflector

ELECTRICAL COMP : On Module, High Efficient Ballast, Ignitor, Capacitor (Optional)

PROTECTION CLASS: IP 65

OTHER FEATURES : Indirect Lighting with Ultra-Bright Upper Mirror Reflector
DKP & Electrostatic Painted Housing
Reflector Supporting Arms.
Maximum Resistancy to Dust, Water and Moisture
Plated Steel Pipe & Electrostatic Painted Pole

USAGE AREAS : Parks, Walking Paths, Structure Surrounding Applications, Sites, Open Car Lots, Residential, Commercial Complexes, Applications where Decorative Outdoor Lighting Preferred

GÖVDE : Alüminyum Döküm & Elektrostatik Boyalı

CAM/DİFÜZÖR : Temperli Cam

REFLEKTÖR : Metalize Polikarbon (PC) Reflektör

ELEKTRİKSEL KOMP: Kit Halinde, Yüksek Verimli Balast, İgnitör, Kondansatör (Opsiyonel)

KORUMA SINIFI : IP 65

DIĞER ÖZELLİKLER : Ultra-Parlak Üst Yansıtıcı ile Endirekt Aydınlatma
Gövde & Elektrostatik Reflektör Destek Kolları.
Toz, Nem ve Suya Karşı Maksimum Dayanıklılık
Kaplama Çelik Boru & Elektrostatik Boyalı Direk

KULLANIM ALANLARI : Parklar, Yürüyüş Yolları, Bina Çevreleri, Siteler, Konut-İş Merkezi Çevre Aydınlatmaları, Meydanlar, Açık Otopark Uygulamaları, Alan Aydınlatmaları, Dekoratif Aydınlatmanın Tercih Edildiği Dış Mekan Uygulamaları

LAMP TYPE	SOCKET	ØA (mm)	B (mm)	H (mm)	H1 (mm)	K.G.
1x70 W M.H.	G12	550	-	440	4000-6000	12,0
1x150 W M.H	G12	550	-	440	4000-6000	13,0

BOX / KOLİ
(mm)

